


Feb.1.2026 Copyright 2026 HIROSE ELECTRIC CO., LTD. All Rights Reserved.  
 In case of consideration for using Automotive equipment / device which demand high reliability, kindly contact our sales window correspondents.

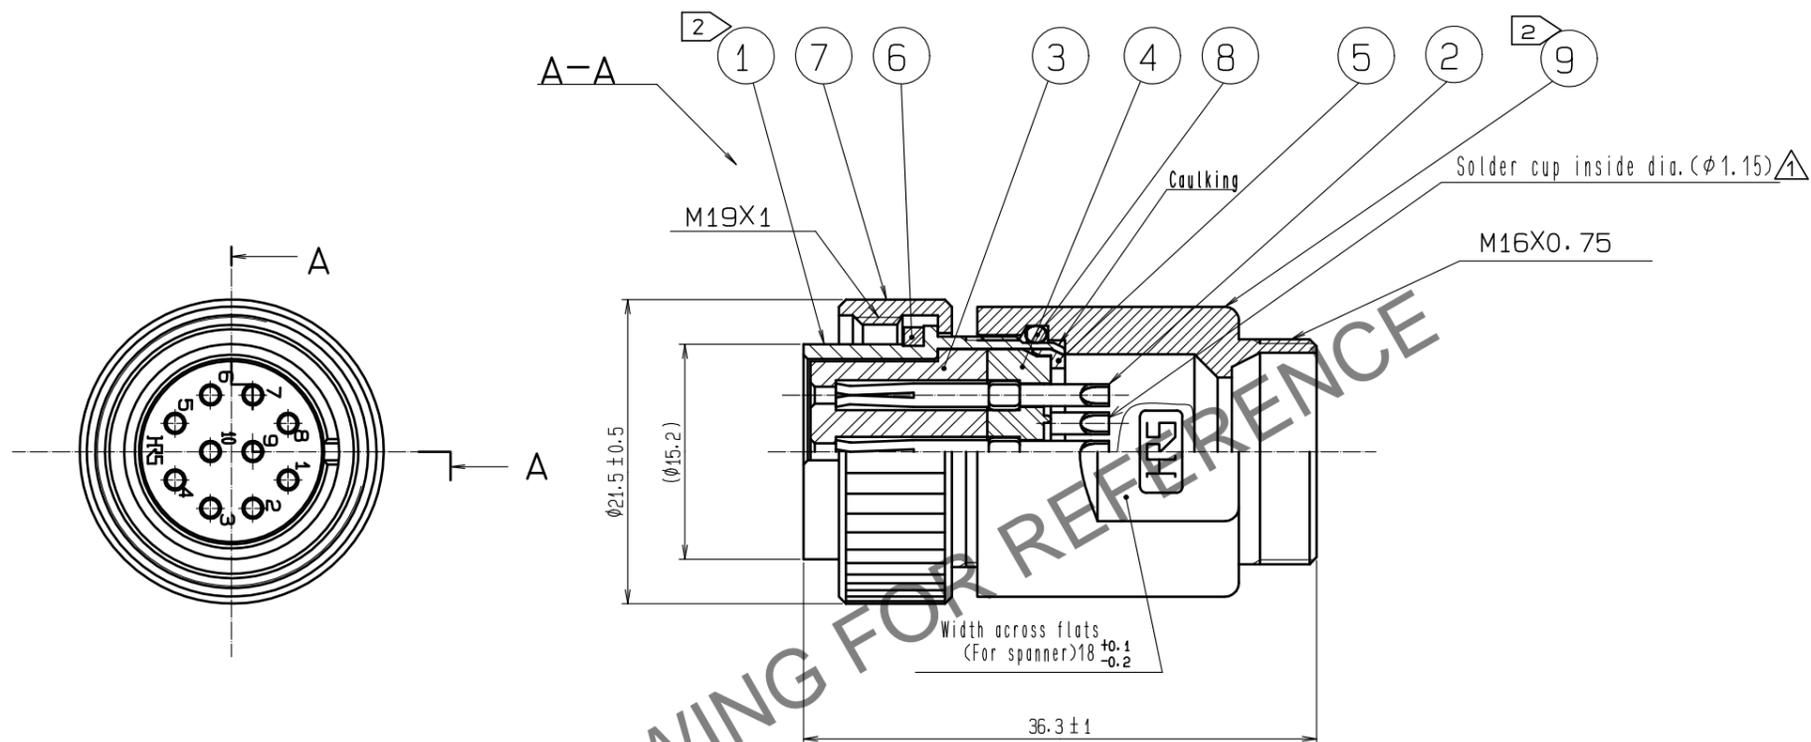

- Notes
- 1 Rotation example of Ref. No. ① and ⑨ are shown.
  - 2 The tightening torque of Ref. No. ⑨: 2 to 3 N·m.  
Apply Loctite 243 HENKEL JAPAN or equivalent to the threaded portion of Ref. No. ① in order to prevent loosening.
  - 3 This product to be used with cableclamp, JR13WCC-※(72).  
※ designate diameter of applicable cable.
  - 4 The cable pull and twisting strength, waterproof tightness and other characteristics may differ, depending on the cable structure, please confirm before the use.

NO.	MATERIAL	FINISH .	REMARKS	NO.	MATERIAL	FINISH .	REMARKS
5	Polyacetal	(White)					
4	Polyphenylene sulfide	(Black)		9	Zinc alloy	Chrome plating	
3	Polyphenylene sulfide	(Black)		8	Silicone rubber	(Black)	
2	Copper alloy	Silver plating 5μm min.		7	Brass	Chrome plating	
1	Zinc alloy	Chrome plating		6	Silicone rubber	(Red)	

UNITS mm		SCALE 2 : 1	COUNT 1	DESCRIPTION OF REVISIONS DIS-C-00015643	DESIGNED HT. ZENBA	CHECKED HY. KOBAYASHI	DATE 20230626
<b>HRS</b> HIROSE ELECTRIC CO., LTD.		APPROVED : HY. KOBAYASHI 20230120	DRAWING NO. EDC-111066-81-00				
		CHECKED : HY. KOBAYASHI 20230120	PART NO. RM15WTPZ-10S(81)				
		DESIGNED : HT. ZENBA 20230120	CODE NO. CL0109-1614-3-81				
		DRAWN : KR. SUZUKI 20230118					